

# WOLVERINE BRASS, INC.

## FINALE PULL-OUT-SPRAY KITCHEN FAUCETS

### FAUCET CONSTRUCTION:

- 35mm CERAMIC DISC WITH HOT LIMIT ADJ. RING
- BRASS BODY WITH COPPER SUPPLIES.
- BRASS SUPPLY CONNECTION ADAPTERS WITH 1/2" IPS THREADS.
- ZAMAC #3 CHROME PLATED METAL HANDLE.




- 85035 - CHROME
- 8503504 - BRUSH NICKEL
- 8503505 - OIL RUB BRONZE

### OPERATION:

- SINGLE CONTROL LEVER HANDLE.
- REQUIRES LESS THAN 5 LB FORCE TO OPERATE VALVE.
- TEMP. ADJUSTMENT 90° FROM FULL HOT TO FULL COLD.
- 1.8 GPM (6.8 L/min) AERATOR.


SINGLE HOLE MOUNT



### STANDARDS:

- IAPMO/UPC CERTIFIED:
  - ASME A112.18.1-2012/CSA B125.1-12
  - NSF/ANSI 61-2012
  - NSF/ANSI 372-2011 (LEAD FREE)

THREE HOLE MOUNT

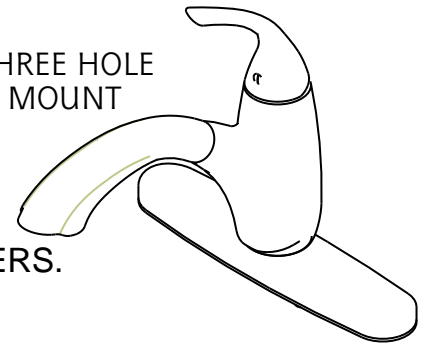

### MOUNTING SURFACE REQUIREMENTS:

- SURFACE THICKNESS 1-3/4" MAXIMUM.
- THREE (1-3/8" MIN TO 1-5/8" MAX DIA.) HOLES 4" ON CENTERS.

